


Max Burton® 12-Volt Heated Blanket #6997

IMPORTANT SAFEGUARDS

- Read all instructions before operating
- To avoid electric shock and injury, do not use on infants or anyone incapable of unplugging the blanket without assistance
- Do not use on anyone sensitive to heat
- Do not lay on top of blanket. Use as a covering only.
- Do not immerse cord or unit in water or other liquids
- Do not use for anything other than its intended use
- Do not use as a pet heating blanket
- Do not use if blanket is wet or damaged
- Do not machine wash and dry, or dry clean
- Do not leave unattended while on. Unplug when not in use.
- Never wrap cord around product as this may damage the cord
- Never use AC current to power. Use only with 12V power.
- Administer close supervision when using around children

PARTS IDENTIFICATION

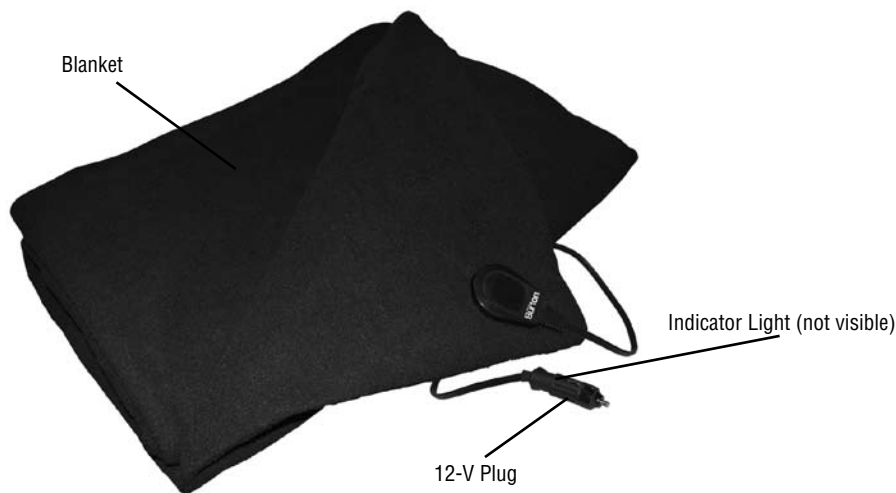

OPERATION

1. Unfold blanket and inspect for damage before every use.
1. Plug the 12-V DC plug into any 12-V power receptacle or cigarette lighter.
2. Check that the LED light on the plug is lit indicating 12-volt power is active.
3. The blanket will automatically maintain a warm comfortable temperature between 100°F and 130°F.
4. The blanket may be used with our 200-watt Converter #6993 to allow it to plug into any 120V electrical outlet. Available from your local retailer or www.aervoe.com.

CLEANING

- Spot hand wash with a wet cloth, soft brush and a mild detergent.
- Allow blanket to thoroughly dry before use.
- DO NOT BLEACH
- DO NOT MACHINE WASH OR DRY OR DRY CLEAN

TROUBLESHOOTING

If the 12-volt circuit fails to operate, try the following suggestions:

1. Unplug from the power supply and make sure that the receptacle is clean. DO NOT USE METAL TOOLS. If cleaning is needed, use only insulators, such as wood.
2. Check the plug's fuse. Carefully unscrew the plug's top section. Remove and check the fuse with the proper electronic meter. If defective, replace with correct fuse (see specification for type). Also check the vehicle's fuse panel.
3. Some cigarette lighters have a separate circuit breaker located directly behind the cigarette lighter receptacle. If your lighter is not working, this circuit breaker may have blown and could require replacement. Consult your vehicle owner's manual for replacement.

SPECIFICATIONS	
POWER SOURCE	12V DC, 55W
OUTPUT	60 Watts (5A)
FUSE	250V DC 10 amp glass fuse
MATERIAL	100% Polyester
THERMOSTAT TEMPERATURE CONTROL	100°F - 130°F
STORAGE BAG	PVC
POWER CORD	8 ft. long
WEIGHT	2 lbs. (0.92 kg)
DIMENSIONS	59" x 43"

MAX Burton®

12-Volt Heated Blanket

OPERATING INSTRUCTIONS



AerVOE Industries, Inc.
 Gardnerville, NV 89410 • 1-800-227-0196
 www.aerVOE.com • mailbox@aerVOE.com